


## TAJFUN 1000 50/70 MHz

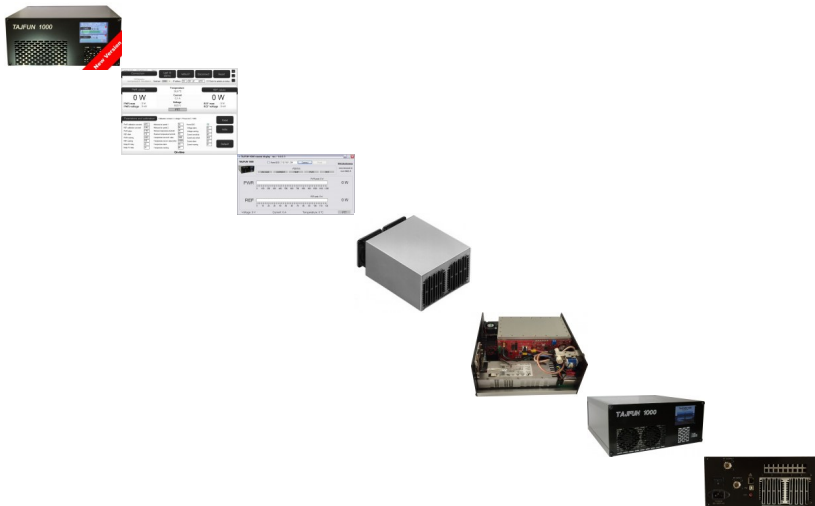

PA TAJFUN 1000 50/70MHz

Rating: Not Rated Yet

**Price:**

Sales price without tax: 2005,00 €

[Ask a question about this product](#)

Manufacturer: [VH Electronics](#)

Description

**New robust Heatsink + Auxiliary small turbine.  
USB & LAN as standard.**



**TAJFUN 1000 is small, lightweight but robust LDMOS Power Amplifier**

- Frequency Coverage: 50 and 70 MHz
- Operating Mode: FM, CW, SSB, DIGI
- Output Power: 1000W CW, 800W SSB, 700W FM a DIGI on 50 MHz
- Push Pull LDMOS
- Input Power: 16-18W default inside 6dB hybrid attenuator (optionally 3dB)
- Power supply inside: 53VDC / 1800W
- Suppression of harmonics:  $\leq 70\text{dBc}$
- Working temperature: 0-45 °C, Max. humidity 90%
- Protection from: PWR, SWR, Tmax, I<sub>max</sub>, U<sub>max</sub>/U<sub>min</sub>
- Control / Display: color TFT display
- Measurement and display:
  - Current
  - Voltage
  - Power
  - Reflected power
  - Peak power
  - Temperature
- USB - configuration, service
- LAN - remote
- Power supply: 195-277VAC, 45-66Hz
- Dimension: 266x105x294mm
- Coaxial Relay: CX600NC - CX140D (without relay as option)
- Weight: 6,2kg

---

Instruction manual:

[TAJFUN 1000 50 70MHz](#)

Software:

[Tajfun 1000 servis \(ver.: 1.0.3.2\)](#)

[Tajfun 1000 Remote Display \(ver.: 1.0.0.3\)](#)

[Tajfun 1000 Remote Display \(ver.: 1.0.0.6\)](#)

[Tajfun 1000 Remote Display \(ver.: 1.0.0.8\)](#)